LC-FID

The LC-FID from ACS/CSI is an innovative instrument, that enables the advantages of flame ionization detection to be used with liquid chromatography.

The LC-FID features

- A novel interface to provide universal detection at eluent flow rates of up to 2 ml/min
- A temperature programmable oven, to give increased versatility in separations, as well as separately controlled temperature zones for the detector, interface chamber and eluent

Versatility

- Ability to use conventional columns (up to 4.6mm I.D.)
- Can be used with Eluent flow rates up to 2 ml/min
- Compatible with high temperature LC columns
- Selectivity controllable by temperature between 30 and 250˚C
- Good reproducibility

Environmentally Friendly

- Uses water as the mobile phase
- Savings in solvent costs and solvent disposal costs

Universal Response

- No chromophore required
- No sample losses because of volativity
- Analyses high and low molecular mass analytes
- Sample does not need to be volatile, allowing broader usage than GC

Typical applications include

- amino acids
- aliphatic compounds, such as aliphatic acids, esters, amides and alkanols
- aromatic compounds
- oligosaccharides and carbohydrates

Flame ionisation detection of n-Alkanols separated on PS-DVB (150 x 4.6 mm) column

Eluent: water at 1 ml.min
Temperature programme: 120 for 1 min then 7 °C / min to 180 C

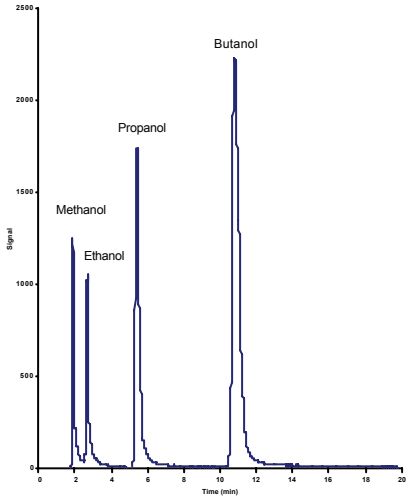

Flame ionisation detection of amino acids separated on PS-DVB (150 x 4.6 mm) column

Eluent water at 1 ml/min
Isothermal at 70 °C

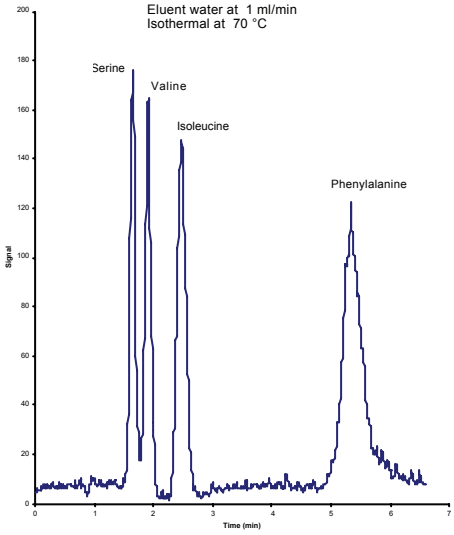

Maltose

Approximately 2.5 µg injected on column

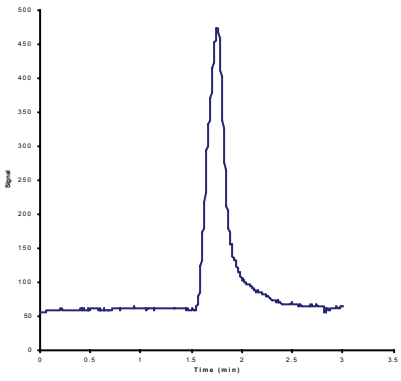

Advanced Chromatography Systems
3547 Meeks Farm Road
Suite A-1
Charleston, SC
29455
USA
Tel: 843 559 4889
Fax: 843 746 4545
Email: info@advancedlcgcs.com
Website: http://www.advancedlcgcs.com

Cambridge Scientific Instruments
12-15 Sedgeway Business Park
Witchford
Cambridgeshire
CB6 2HY
UK
Tel: +44 (0)1353 669916
Fax: +44 (0)1353 669917
Email: info@camsci.co.uk
Website: http://www.camsci.co.uk